# INSTRUCTION MANUAL
# APN AND BASIC NETWORK CONFIGURATION
# Inseego MiFi 8000

## MiFi Device

First step - Insert the Geoverse SIM card

Open the back cover and insert the SIM card into the slot on the top left corner per the figure.

1. Use the included power cable to power the device.
2. Turn on Wi-Fi. It may take several minutes to load.
3. Navigate to Menu, Settings, Advanced Settings
    a. Here, you will find the website and admin password to connect to the device via your computer/laptop. The link will always be http://my.mifi

    Please see the three images below for reference:

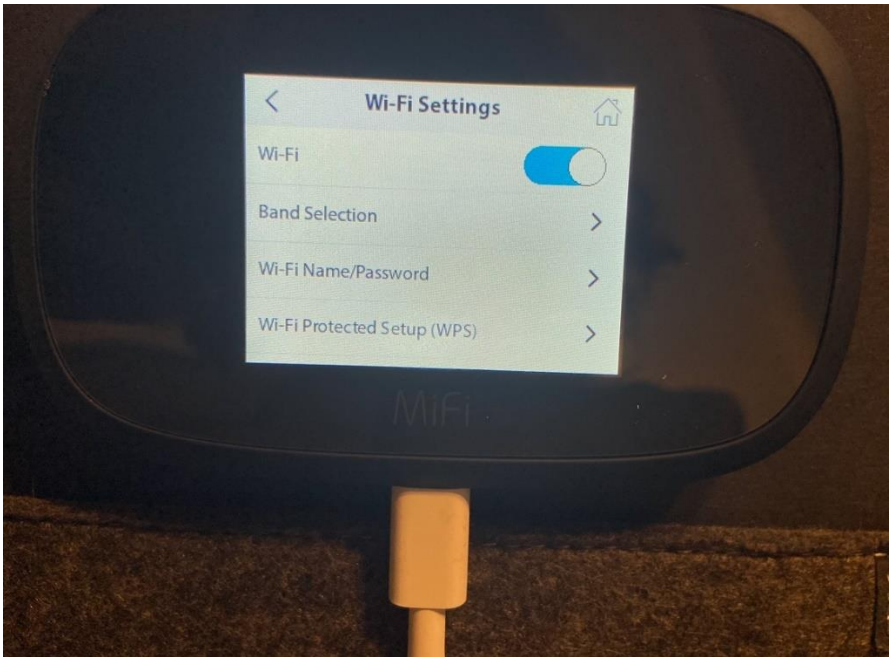

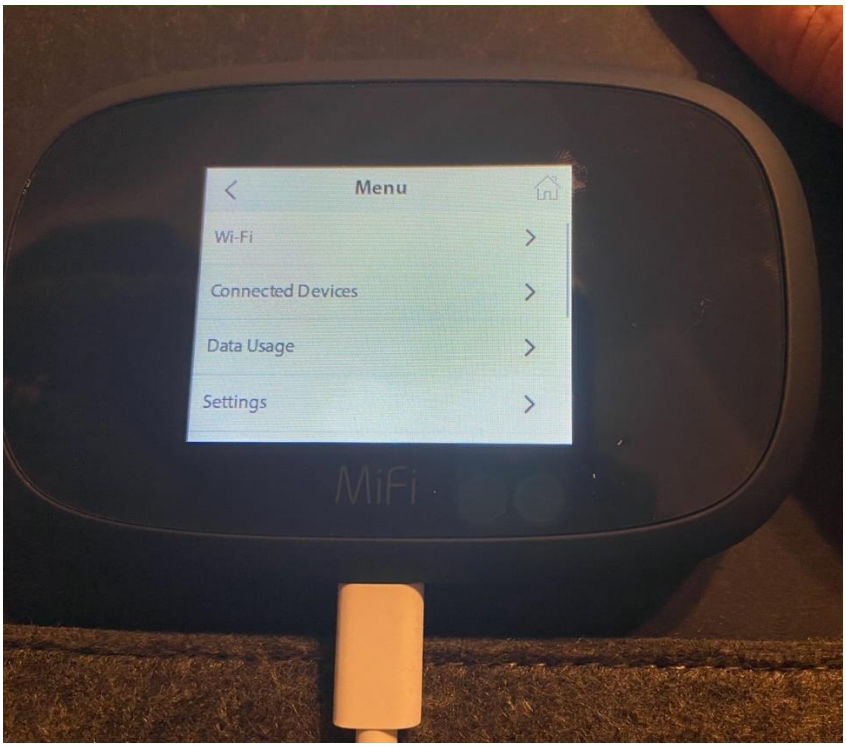
Menu
Wi-Fi
Connected Devices
Data Usage
Settings
MiFi

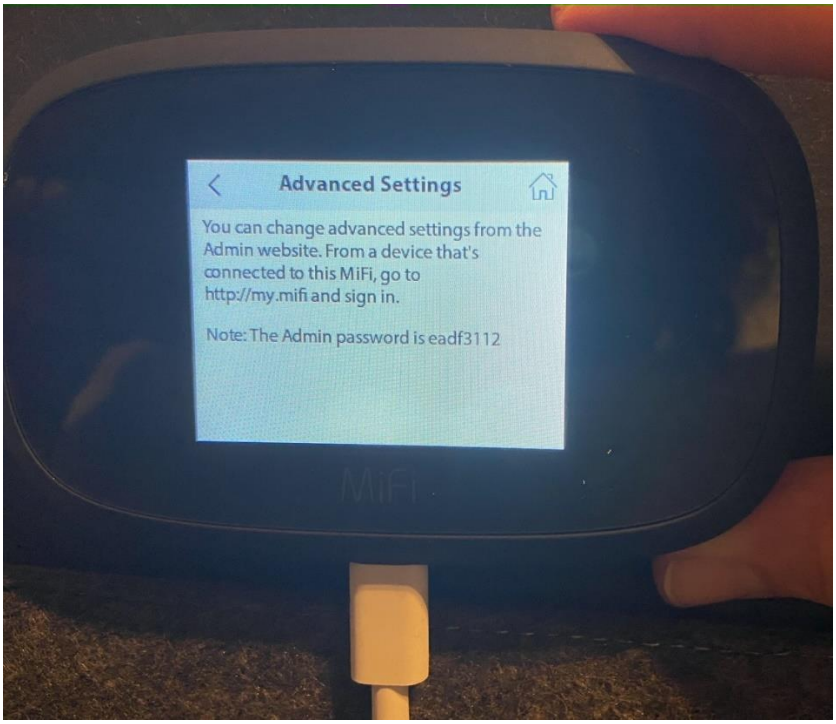
Advanced Settings
You can change advanced settings from the Admin website. From a device that's connected to this MiFi, go to http://my.mifi and sign in.
Note: The Admin password is eadf3112
MiFi

**From Computer/Laptop**

1. Open the Wi-Fi network settings on your laptop/computer
2. Open the list of Wi-Fi networks and connect to the MiFi network. It will be formatted as MiFixxxx-xxxx
3. Go to the following website: http://my.mifi
4. Use the password from the device to sign in
5. Navigate to Settings, then Advanced, then Continue
6. Under APN, enter 'geoverse.[your APN]'
7. Save changes

Once you complete these steps, the device will be activated.

If you still run into trouble, turn roaming on and off as required.